


FIG. 1010CR

1000 PSI CARBON STEEL 1 PC RP BALL VALVE

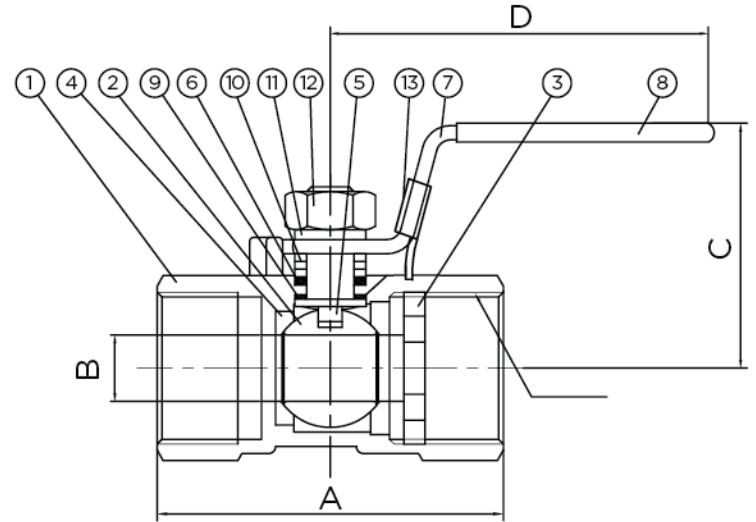

FEATURES

SIZE: 1/4" - 2"
PORT: REDUCED
PRESSURE: 1000 WOG
TEMPERATURE: -49 TO 320F°
CONNECTION: FEMALE NPT

TECHNICAL SPECIFICATION

NPT THREADS AS PER ASME B1.20.1
BLOW-OUT-PROOF STEM DESIGN
LOCKING HANDLE
IN COMPLIANCE WITH NACE
MR-0175
SUITABLE FOR WATER, OIL & GAS


MATERIAL LIST

1	BODY	A216 Gr. WCB
2	BALL	SS304
3	CAP	VIRGIN PTFE
4	SEAT	A216 Gr. WCB
5	STEM	SS304
6	STEM PACKING	VIRGIN PTFE
7	HANDLE	SSS201
8	HANDLE COVER	PVC
9	THRUST WASHER	VIRGIN PTFE
10	GLAND BUSHING	SS304
11	HANDLE WASHER	SS304
12	NUT	A2-70
13	LOCKING PAD	SS201

TEST SPECIFICATION

TEST ACCORDANCE TO PER
API 598
SHELL TEST: 1500 PSISEAT
TEST: 1100 PSI
AIR TEST: 87 PSI

— BODY RATING
..... P: VIRGIN PTFE
--- R: 15% GLASS FILLED

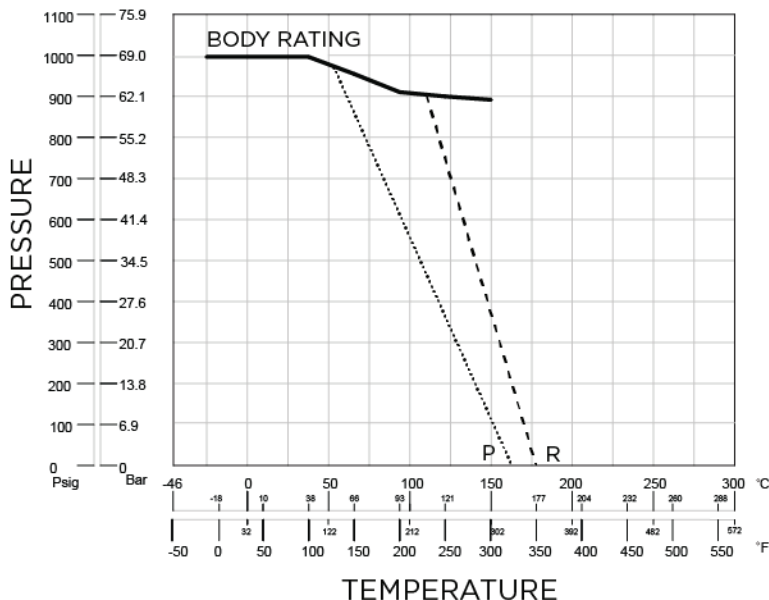


DIMENSIONS & WEIGHT

MODEL	SIZE	A	B	C	D	WEIGHT (KG)
1010CR-02	1/4"	1.57	0.20	1.81	3.07	0.81
1010CR-03	3/8"	1.77	0.28	1.26	3.90	1.35
1010CR-04	1/2"	2.20	0.35	1.57	4.13	0.10
1010CR-05	3/4"	2.36	0.47	1.65	4.69	0.10
1010CR-06	1"	2.83	0.59	1.97	6.10	0.15
1010CR-07	1 1/4"	3.11	0.75	2.13	6.18	0.26
1010CR-08	1 1/2"	3.27	0.94	2.44	6.77	0.44
1010CR-09	2"	3.94	1.26	2.76	8.66	0.67

*DIMENSIONS ARE EXPRESSED IN INCHES
*FOR DIMENSIONS C&D THERE IS A TOLERANCE OF 3 .24
IN, FOR A 3 .08 IN

FIG. 1010CR

1000 PSI CARBON STEEL 1 PC RP BALL VALVE

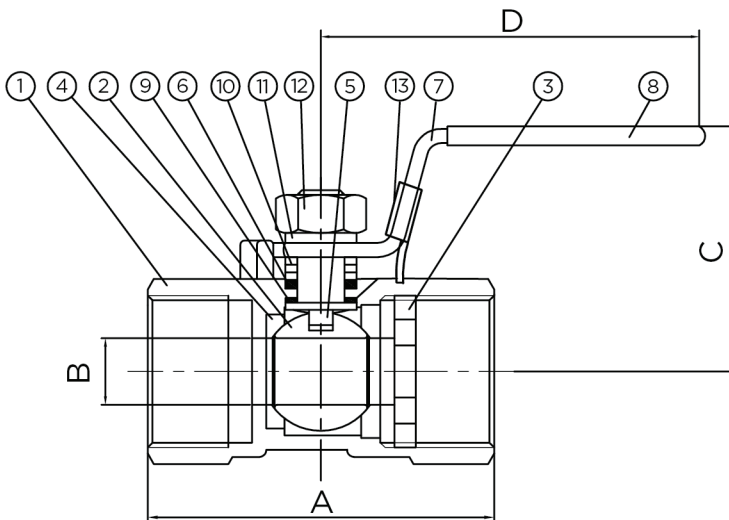

FEATURES

SIZE: 1/4" - 2"
PORT: REDUCED
PRESSURE: 1000 WOG
TEMPERATURE: -49 TO 320F°
CONNECTION: FEMALE NPT


TECHNICAL SPECIFICATION

NPT THREADS AS PER ASME B1.20.1
BLOW-OUT-PROOF STEM DESIGN
LOCKING HANDLE
IN COMPLIANCE WITH NACE MR-0175
SUITABLE FOR WATER, OIL & GAS

TEST SPECIFICATION

TEST ACCORDANCE TO PER
API 598
SHELL TEST: 1500 PSISEAT
TEST: 1100 PSI
AIR TEST: 87 PSI

— BODY RATING
..... P: VIRGIN PTFE
--- R: 15% GLASS FILLED

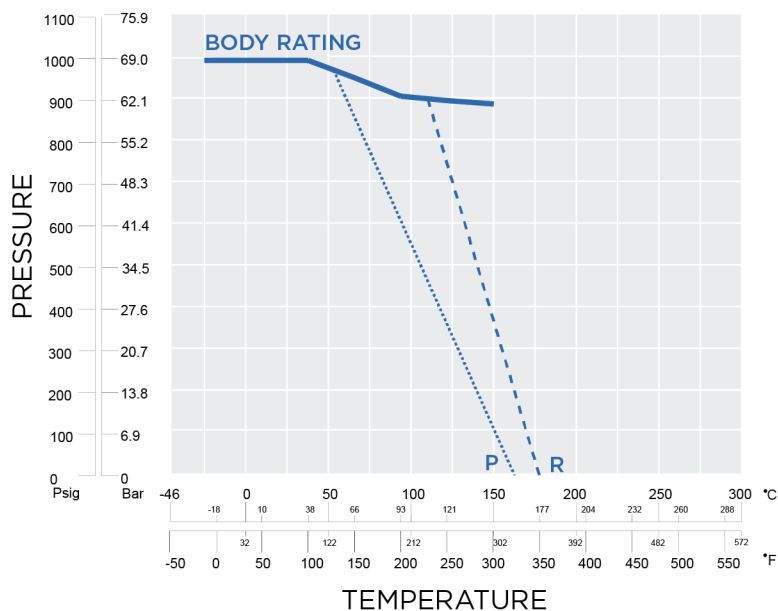

MATERIAL LIST

1	BODY	A216 Gr. WCB
2	BALL	SS304
3	CAP	VIRGIN PTFE
4	SEAT	A216 Gr. WCB
5	STEM	SS304
6	STEM PACKING	VIRGIN PTFE
7	HANDLE	SSS201
8	HANDLE COVER	PVC
9	THRUST WASHER	VIRGIN PTFE
10	GLAND BUSHING	SS304
11	HANDLE WASHER	SS304
12	NUT	A2-70
13	LOCKING PAD	SS201


DIMENSIONS & WEIGHT

MODEL	SIZE	A	B	C	D	WEIGHT (KG)
1010CR-02	1/4"	1.57	0.20	1.81	3.07	0.81
1010CR-03	3/8"	1.77	0.28	1.26	3.90	1.35
1010CR-04	1/2"	2.20	0.35	1.57	4.13	0.10
1010CR-05	3/4"	2.36	0.47	1.65	4.69	0.10
1010CR-06	1"	2.83	0.59	1.97	6.10	0.15
1010CR-07	1 1/4"	3.11	0.75	2.13	6.18	0.26
1010CR-08	1 1/2"	3.27	0.94	2.44	6.77	0.44
1010CR-09	2"	3.94	1.26	2.76	8.66	0.67

*DIMENSIONS ARE EXPRESSED IN INCHES
*FOR DIMENSIONS C&D THERE IS A TOLERANCE
OF .24 IN, FOR A .08 IN

FIG. 1010CR

1000 PSI CARBON STEEL 1 PC RP BALL VALVE

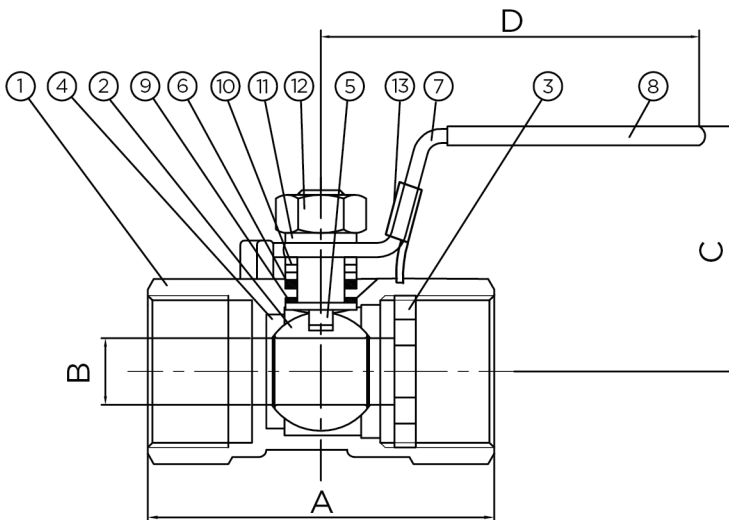

FEATURES

SIZE: 1/4" - 2"
PORT: REDUCED
PRESSURE: 1000 WOG
TEMPERATURE: -49 TO 320F°
CONNECTION: FEMALE NPT


TECHNICAL SPECIFICATION

NPT THREADS AS PER ASME B1.20.1
BLOW-OUT-PROOF STEM DESIGN
LOCKING HANDLE
IN COMPLIANCE WITH NACE MR-0175
SUITABLE FOR WATER, OIL & GAS

TEST SPECIFICATION

TEST ACCORDANCE TO PER
API 598
SHELL TEST: 1500 PSISEAT
TEST: 1100 PSI
AIR TEST: 87 PSI

— BODY RATING
..... P: VIRGIN PTFE
--- R: 15% GLASS FILLED

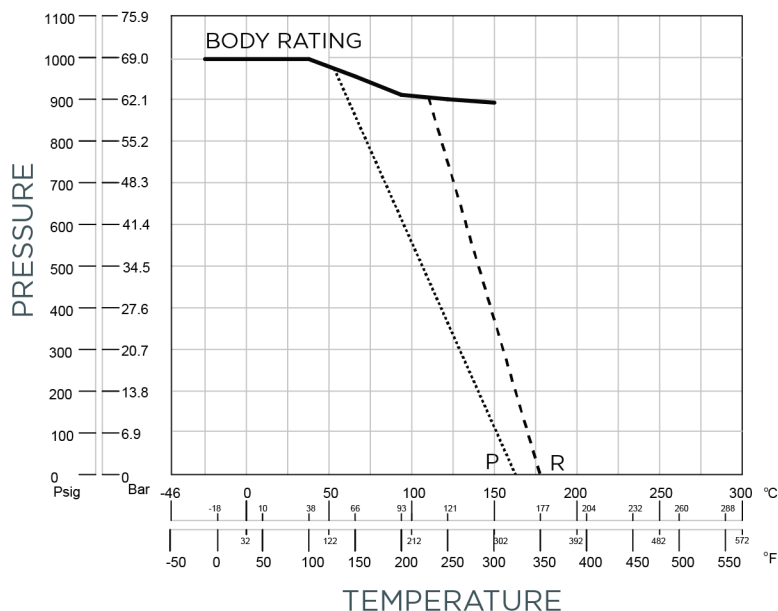

MATERIAL LIST

1	BODY	A216 Gr. WCB
2	BALL	SS304
3	CAP	VIRGIN PTFE
4	SEAT	A216 Gr. WCB
5	STEM	SS304
6	STEM PACKING	VIRGIN PTFE
7	HANDLE	SSS201
8	HANDLE COVER	PVC
9	THRUST WASHER	VIRGIN PTFE
10	GLAND BUSHING	SS304
11	HANDLE WASHER	SS304
12	NUT	A2-70
13	LOCKING PAD	SS201


DIMENSIONS & WEIGHT

MODEL	SIZE	A	B	C	D	WEIGHT (KG)
1010CR-02	1/4"	1.57	0.20	1.81	3.07	0.81
1010CR-03	3/8"	1.77	0.28	1.26	3.90	1.35
1010CR-04	1/2"	2.20	0.35	1.57	4.13	0.10
1010CR-05	3/4"	2.36	0.47	1.65	4.69	0.10
1010CR-06	1"	2.83	0.59	1.97	6.10	0.15
1010CR-07	1 1/4"	3.11	0.75	2.13	6.18	0.26
1010CR-08	1 1/2"	3.27	0.94	2.44	6.77	0.44
1010CR-09	2"	3.94	1.26	2.76	8.66	0.67

*DIMENSIONS ARE EXPRESSED IN INCHES
*FOR DIMENSIONS C&D THERE IS A TOLERANCE OF .24 IN, FOR A .08 IN

FIG. 1010CR

1000 PSI CARBON STEEL 1 PC RP BALL VALVE

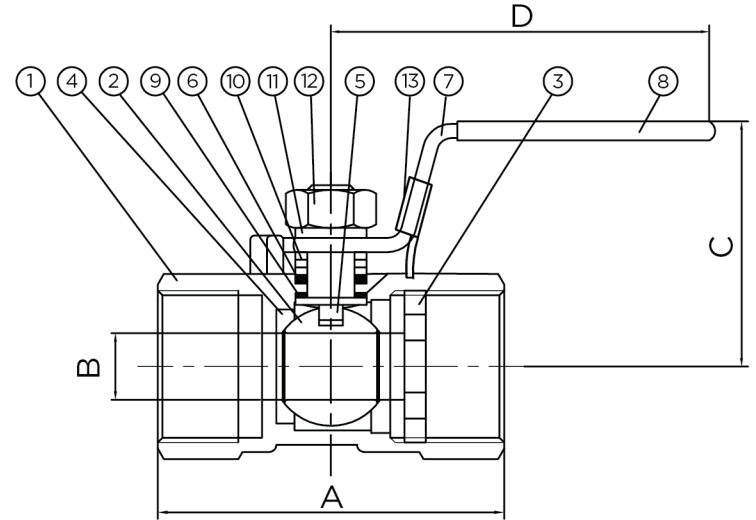

FEATURES

SIZE: 1/4" - 2"
PORT: REDUCED
PRESSURE: 1000 WOG
TEMPERATURE: -49 TO 320F°
CONNECTION: FEMALE NPT


TECHNICAL SPECIFICATION

NPT THREADS AS PER ASME B1.20.1
BLOW-OUT-PROOF STEM DESIGN
LOCKING HANDLE
IN COMPLIANCE WITH NACE MR-0175
SUITABLE FOR WATER, OIL & GAS

TEST SPECIFICATION

TEST ACCORDANCE TO PER
API 598
SHELL TEST: 1500 PSISEAT
TEST: 1100 PSI
AIR TEST: 87 PSI

— BODY RATING
..... P: VIRGIN PTFE
--- R: 15% GLASS FILLED

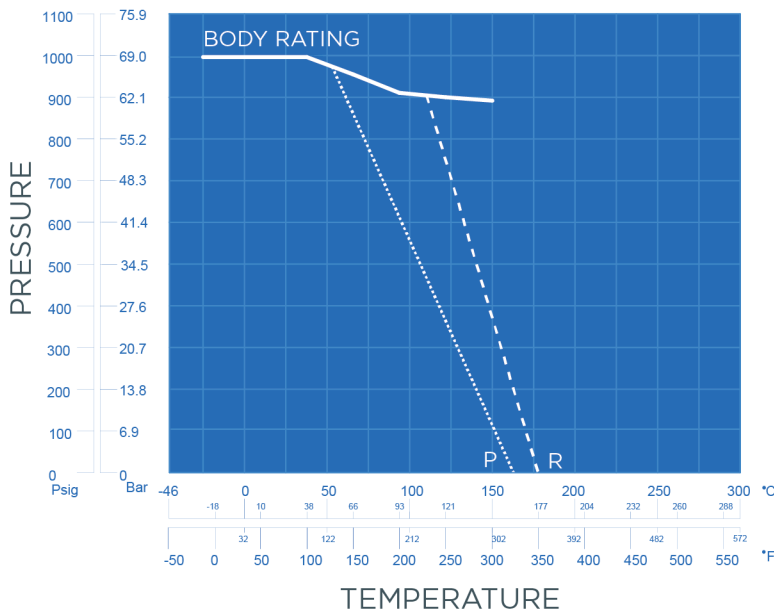

MATERIAL LIST

1	BODY	A216 Gr. WCB
2	BALL	SS304
3	CAP	VIRGIN PTFE
4	SEAT	A216 Gr. WCB
5	STEM	SS304
6	STEM PACKING	VIRGIN PTFE
7	HANDLE	SSS201
8	HANDLE COVER	PVC
9	THRUST WASHER	VIRGIN PTFE
10	GLAND BUSHING	SS304
11	HANDLE WASHER	SS304
12	NUT	A2-70
13	LOCKING PAD	SS201

DIMENSIONS & WEIGHT

MODEL	SIZE	A	B	C	D	WEIGHT (KG)
1010CR-02	1/4"	1.57	0.20	1.81	3.07	0.81
1010CR-03	3/8"	1.77	0.28	1.26	3.90	1.35
1010CR-04	1/2"	2.20	0.35	1.57	4.13	0.10
1010CR-05	3/4"	2.36	0.47	1.65	4.69	0.10
1010CR-06	1"	2.83	0.59	1.97	6.10	0.15
1010CR-07	1 1/4"	3.11	0.75	2.13	6.18	0.26
1010CR-08	1 1/2"	3.27	0.94	2.44	6.77	0.44
1010CR-09	2"	3.94	1.26	2.76	8.66	0.67

*DIMENSIONS ARE EXPRESSED IN INCHES
*FOR DIMENSIONS C&D THERE IS A TOLERANCE OF .24 IN, FOR A .08 IN